



QUICK START GUIDE

SETTING UP YOUR S103EX STAINLESS STEEL COMPRESSION SPRAYER

190468



1. Assemble Hose To Tank

1. Align hose and screw on to tank. (See Figure A).
2. Tighten with a 5/8" wrench. (See Figure B).
3. Hold tank fitting with a 16 mm wrench while tightening hose to tank.



Figure A



Figure B

2. Assemble Shutoff to Hose

1. Wrap teflon tape around hose fitting threads 2X in a clockwise direction.
2. Attach hose to shutoff and tighten securely using a 14 mm wrench. Use a 3/4" wrench to hold the shutoff handle while tightening the hose. (See Figure C)

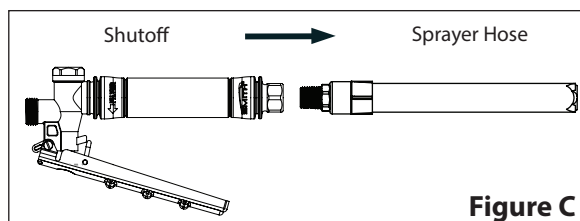


Figure C

3. Assemble Wand to Shutoff

Install the extension onto the shutoff assembly and tighten the nut securely using a 13/16" wrench. Make sure extension gasket is in place during assembly.

(See Figure D)

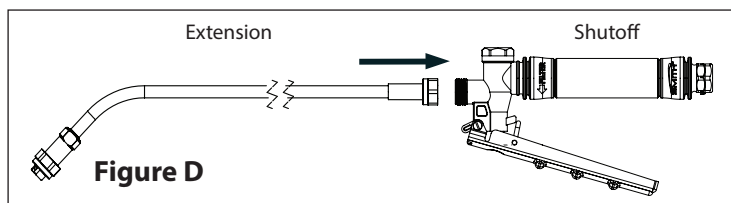


Figure D

4. Assemble 24" Stainless Steel Extension

Install selected nozzle into the extension nut and tighten nut securely using a 13/16" wrench. Insert check valve if required and make sure nozzle tip gasket is in place as shown.

(See Figure E)

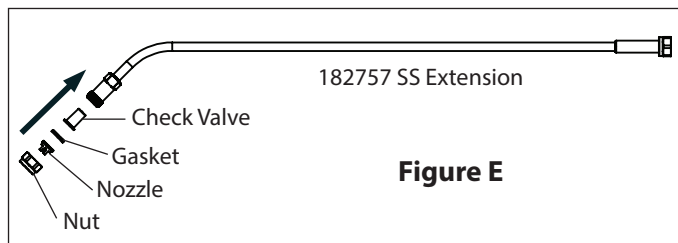



Figure E

5. Pump Unlocking and Pressurizing


TO UNLOCK PUMP: Turn handle counterclockwise until 4-prong clamp is loose, then rotate clamp counterclockwise aligning the tabs with the slots in the neck of the tank and remove the pump.

TO LOCK PUMP: Align clamp tabs with the slots in the neck of the tank and lower the pump assembly, rotate the 4-tab clamp clockwise to the stop position and rotate the handle clockwise to tighten, seal and lock the tank cover.


TO PRESSURIZE: Push down on the handle to depress coil spring and turn handle 1/4 turn counterclockwise to unlock handle. Pressurize the sprayer by pumping the handle in a smooth up and down motion. Push down on the handle to depress coil spring and turn handle 1/4 turn clockwise, then allow handle to raise into lock position.

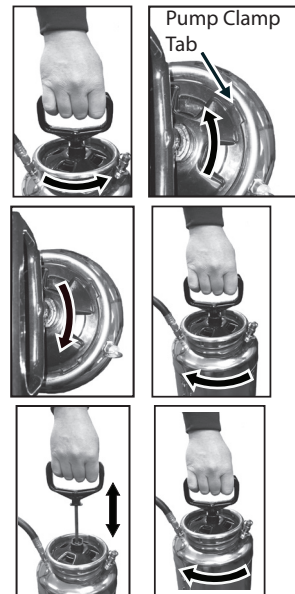


PARTS INCLUDED WITH YOUR
STAINLESS STEEL COMPRESSION SPRAYER
S103EX
190468

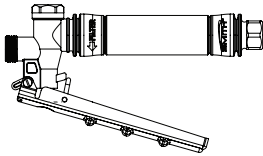

186360
SHUTOFF
VITON EXTREME

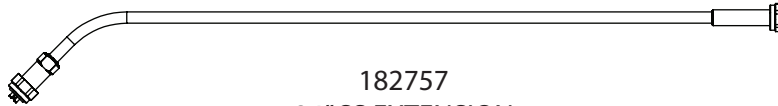

182757
24" SS EXTENSION

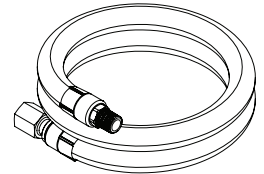

183381
HOSE 50"




176332
CHECK VALVE
POLY PRO BLACK



182577
TIP, TEEJET BRASS
TP9505




182618
WARRANTY CARD

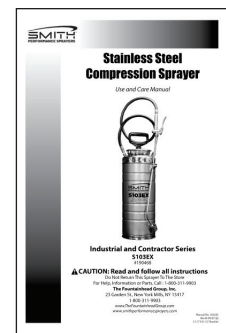


183283 MANUAL


AVAILABLE SERVICE KITS FOR YOUR
INDUSTRIAL CONCRETE
S103EX SPRAYER
190468

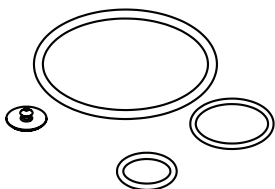


183120 PUMP
SERVICE KIT

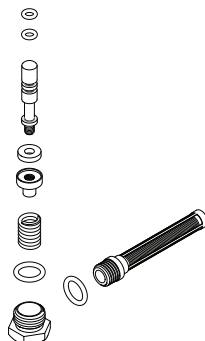

183123 SHUT-OFF
SERVICE KIT

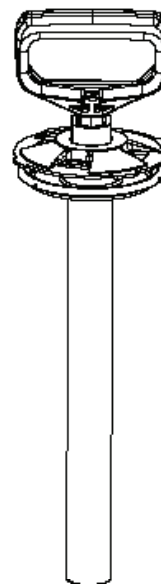

183118 PUMP
REPLACEMENT KIT



185626 PISTON
REPLACEMENT KIT